


Gewindeeinsätze für Thermoplaste

Einbringung durch Wärme oder Ultraschall Double
Stripe – DC

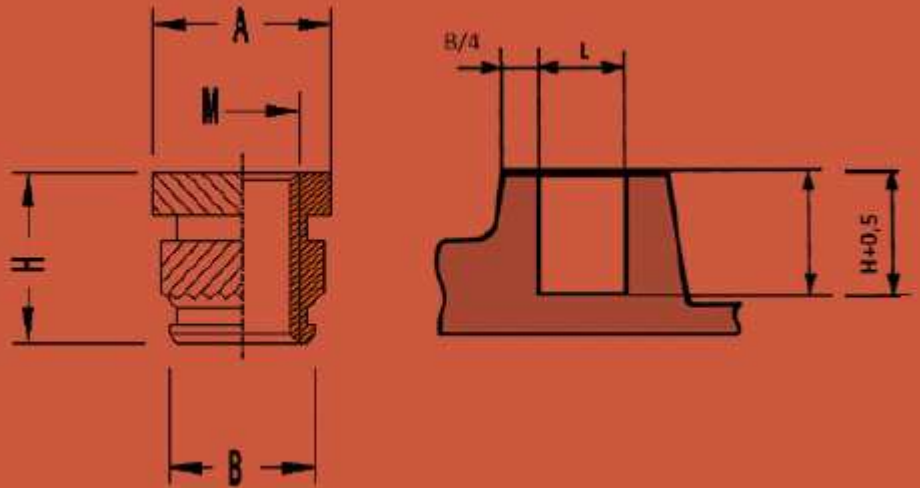

M	H	A	B	L	SIMAF ref.			
2	4	3.6	3.1	3.2	DC	20	H	40
2	3	3.6	3.1	3.2	DC	20	H	30
2.5	5.7	4.6	3.9	4	DC	25	H	57
2.5	4	4.6	3.9	4	DC	25	H	40
3	5.7	4.6	3.9	4	DC	30	H	57
3	4	4.6	3.9	4	DC	30	H	40
3	4.8	4.6	3.9	4	DC	30	H	48
3.5	7.1	5.4	4.7	4.8	DC	35	H	71
3.5	5	5.4	4.7	4.8	DC	35	H	50
4	8.2	6.3	5.5	5.6	DC	40	H	82
4	4	6.3	5.5	5.6	DC	40	H	40
4	4.8	6.3	5.5	5.6	DC	40	H	48
4	5.8	6.3	5.5	5.6	DC	40	H	58
5	9.5	7.1	6.3	6.4	DC	50	H	95
5	5.8	7.1	6.3	6.4	DC	50	H	58
6	12.7	8.7	7.9	8	DC	60	H	127
6	6.8	8.7	7.9	8	DC	60	H	68
6	9.5	8.7	7.9	8	DC	60	H	95
8	12.7	10.2	9.5	9.6	DC	80	H	127

Manuelles oder halbautomatisches thermische Setzgerät
für SERPLAST Gewindeeinsätze auf Anfrage.