


# Gewindeeinsätze für Thermoplaste

Einbringung durch Wärme oder Ultraschall  
Double Stripe mit Flachkopf – Typ DCC

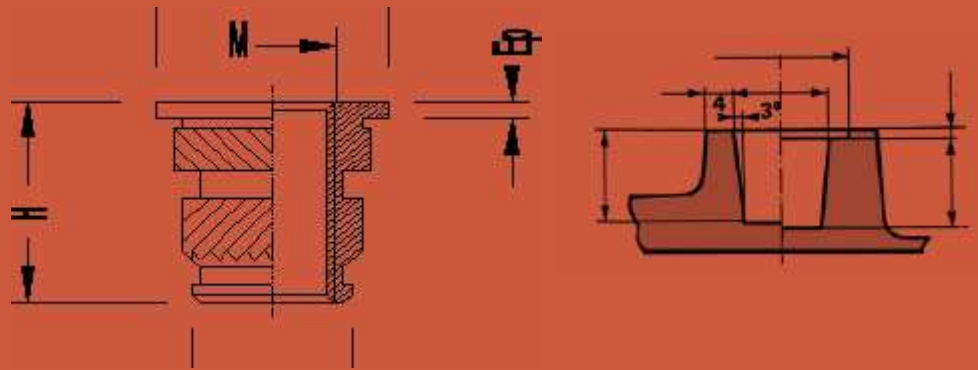

M	H	A	B	L	Ep	SIMAF ref.			
2	4.53	4.8	3.1	3.2	0.53	DCC	20	H	40
2	3.53	4.8	3.1	3.2	0.53	DCC	20	H	30
2.5	6.31	5.5	3.9	4	0.61	DCC	25	H	57
2.5	4.61	5.5	3.9	4	0.61	DCC	25	H	40
3	6.31	5.5	3.9	4	0.61	DCC	30	H	57
3	4.61	5.5	3.9	4	0.61	DCC	30	H	40
3	5.41	5.5	3.9	4	0.61	DCC	30	H	48
3.5	7.86	6.4	4.7	4.8	0.76	DCC	35	H	71
3.5	5.76	6.4	4.7	4.8	0.76	DCC	35	H	50
4	9.11	7.1	5.5	5.6	0.91	DCC	40	H	82
4	4.91	7.1	5.5	5.6	0.91	DCC	40	H	40
4	5.71	7.1	5.5	5.6	0.91	DCC	40	H	48
4	6.71	7.1	5.5	5.6	0.91	DCC	40	H	58
5	10.59	7.9	6.3	6.4	1.09	DCC	50	H	95
5	6.89	7.9	6.3	6.4	1.09	DCC	50	H	58
6	14.05	9.5	7.9	8	1.35	DCC	60	H	127
6	8.15	9.5	7.9	8	1.35	DCC	60	H	68
6	10.85	9.5	7.9	8	1.35	DCC	60	H	95
8	14.05	11.1	9.5	9.6	1.35	DCC	80	H	127

Manual or semi-automatic installation tool by thermic process  
for SERPLAST inserts on demand.