



DIN Gewindeeinsatz sechskant geschlossen

DIN 16903 Form P und R
zum umspritzen

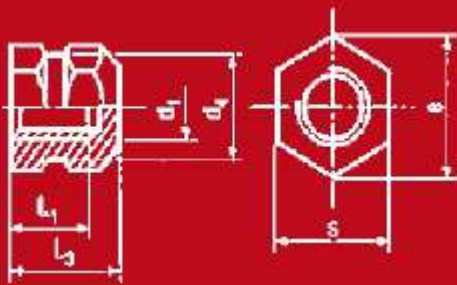

Forme P
HEX with no spigot
l1 H d1

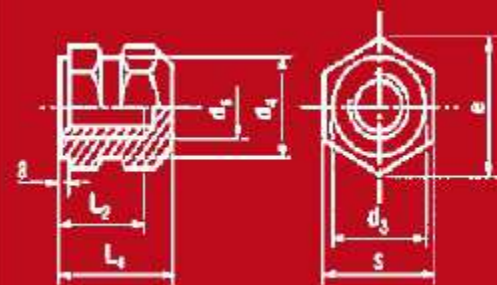

Forme R
HEX with spigot
l2 H 1,5 d1

MATERIAL

Messing : LO
Stahl/Zn : AB

Koaxialität Toleranz
nach Norm
DIN 7184

Gewinde d1	M2	M2,5	M3	(M3,5)*	M4	M5	M6	
a	1	1	1	1	1	1	1	1
d4	3.8	4.5	5	6.4	7.4	10.4	13	17
d3	4.2	5	5.5	7	8	10	12.5	16
e	5.8	6.1	6.9	8.1	10.4	12.7	16.2	21.9
l1 h14	3	3.5	4	5	6	8	10	12
l2 h14	4.5	5.5	6	7.5	9	12	15	18
l3 h12	5.5	6	7	8.3	9.8	12.6	15	17.8
l4 h12	7	8	9	10.8	12.8	16.6	20	23.8
s	5	5.5	6	7	9	11	14	19

*Achtung : M3.5 ist kein Standardartikel